

W360 Animal Health UVA / UVB Light

30W LED / 130°



- Broadband UVA for Animal Health
- UVB for Reptile Vitamin D3 Synthesis
- Adjustable Intensity
- DMX Controllable
- Also Available with Other Optics

ORDERING GUIDE

KSW360X - **UVBA** - - - -

Spectrum

UVBA UVBA

Finish

WH White
BK Black

Mount

TOX w/ O-type DMX Track Adapter
TON w/ O-type Non-DMX Track Adapter
CLP w/ Clamp Mount
MPT w/ Monopoint Adapter Mount (PSX+120V only)

Power Supply & Control

PS Power Supply



PSX Power Supply w/ DMX
(compatible with TOX/MPT mount)



Plug/Connection


US US 120V
EU EU 220V

SPECIFICATIONS


Beam Angle	130°
Spectrum Type	UVBA
Control	Intensity (0% - 100%)
LED Source	DiCon Dense Matrix LED
AC Power Draw	30W max
AC Input Voltage	100 - 240V AC, 60Hz
Cooling	Fan Cooled
Operating Temperature	32 - 104°F (0 - 40°C)
Fixture Weight	0.8lb (0.3kg)
Power Supply Weight	1.0lb (0.4kg)
Approved Regulatory Standards	cETLus, FCC, RoHS, WEEE

MECHANICAL FIGURES


W360X-TOX/TON

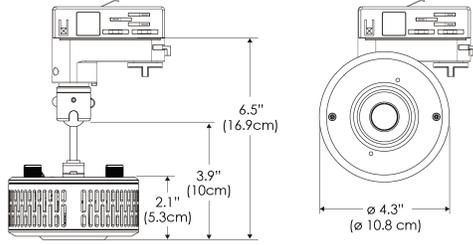


PS **US**




PSX **US**




W360X-TOX/TON

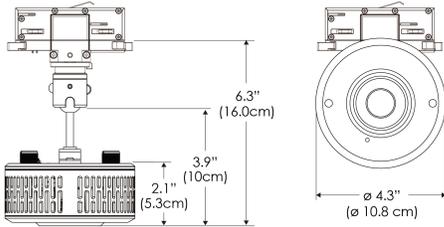


PS **EU**




PSX **EU**



W360X-CLP

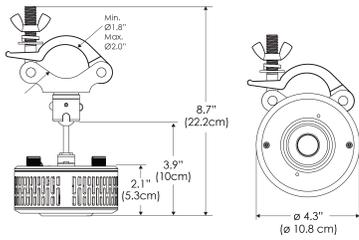


PS **US EU**



*All -CLP configuration models come with standard clamp pipe diameters that range from 1.8" to 2.0".

Mounting Bracket Dimensions ALL-CLP




*All -CLP configuration models come with standard DC cables of 6" and AC cables of 6'.


W360X-MPT




PSX **US**

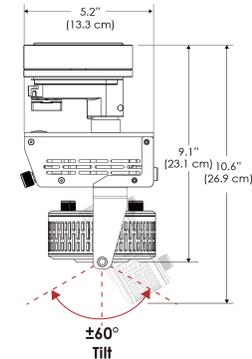

PSX **EU**

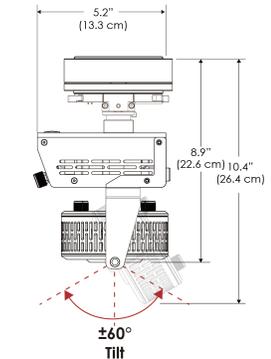

PHOTOMETRIC DATA

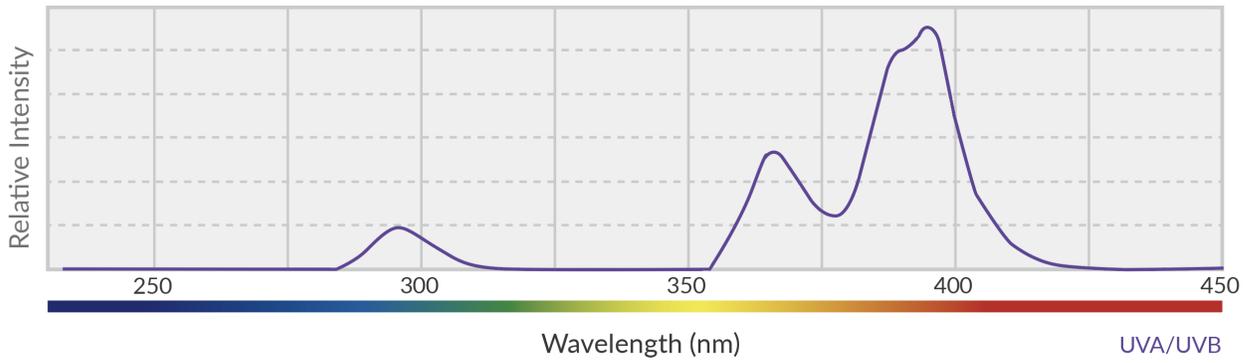

Distance		1' (~0.3 m)	3' (~0.9 m)	5' (~1.5 m)
 130°	Total UV	1446	135	48
	UVA	1330	127	45
	UVB	115	7	2
Beam Diameter		Ø 4.6' (1.4m)	Ø 13.9' (4.2m)	N/A